


SENSORFLEX® sensor actuator cable, PVC, PUR, PVC/PUR

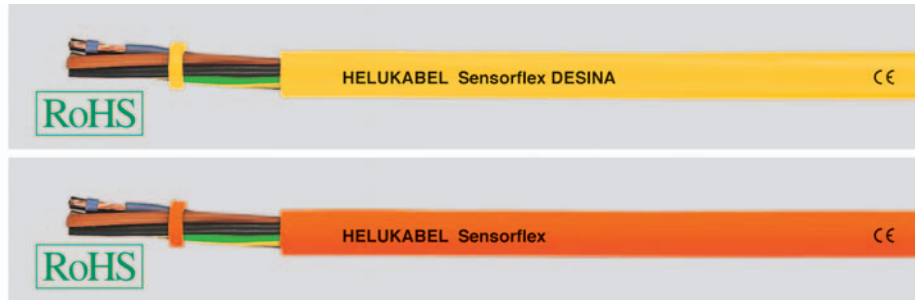

Technical data

- **Temperature range**
flexing -5°C to +80°C
fixed installation -30°C to +80°C
- **Peak operating voltage**
up to 0,25 mm² 350 V
from 0,34 mm² 500 V
- **A.c. test voltage**, 50 Hz
up to 0,25 mm² 1200 V
from 0,34 mm² 2000 V
- **Minimum bending radius**
SENSORFLEX® PUR 7,5x cable Ø
SENSORFLEX® PVC/PUR 7,5x cable Ø
SENSORFLEX® PVC 15x cable Ø

Cable structure

SENSORFLEX®PVC

- Bare copper-conductor, to DIN VDE 0295 cl.5 or cl.6, fine-wire or extra-fine-wire, BS 6360 cl.5 or cl.6, IEC 60228 cl.5 or cl.6
- Core insulation of PVC
- Core identification see table below
- Outer sheath of special PVC

SENSORFLEX®PUR

- Bare copper-conductor, to DIN VDE 0295 cl.6, extra-fine-wire, BS 6360 cl.6, IEC 60228 cl.6
- Core insulation of PVC
- Core identification see table below
- Outer sheath of PUR

SENSORFLEX®PVC/PUR

- Construction as per SENSORFLEX® PVC
- PVC inner sheath, with PUR sheath applied over it by means of coextrusion

Properties

SENSORFLEX®PVC

- Extensively oil resistant; Chemical Resistance (see table Technical Informations)
- PVC self-extinguishing and flame retardant acc. to DIN VDE 0482-332-1-2, DIN EN 60332-1-2, IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)

SENSORFLEX®PUR

- low adhesion, extremely abrasion resistant, resistant to hydrolysis and microbial attack

Special feature

- The cables with the highly flexible stranded conductor, cl. 6, are **suitable for drag chain applications**
- These cables are produced to high quality specifications and conform with a yellow sheath to the DESINA®-standard

Sheath colour yellow (RAL 1021) acc. to DESINA®

Note

- All cables can be delivered with UL/CSA approval and Cu shield.
- DESINA®: Explanation: see introduction.

Application

For decentralised installation and control technology. These cables are used in connector systems for sensors and actuators. In combination with injected circular connectors and installed actuator-sensor boxes, they constitute an important connecting element between the periphery and the PLC in production systems. The assembled cables offer attractive opportunities for reducing costs, not only in the field of automation technology, but also in the entire manufacturing industry. While previously it was necessary to carry out time-consuming wiring of switchgear cabinets and machines, now field bus technology has made it possible to move the periphery interfaces from the switchgear cabinets to the machines and systems. Moving the I/O points to the system periphery enables significant reductions in installation costs.

CE= The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no. yellow	orange	grey	Cable structure No. cores x cross-sec. mm ²	Sheath material	Core colours	Fine wire	High flex **	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
76061	76076	73473	3 x 0,25	PVC	BN, BU, BK		X	4,4	7,2	22,0	24
76062	76077	73466	3 x 0,25	PUR	BN, BU, BK		X	4,4	7,2	22,0	24
76063	76078	73474	4 x 0,25	PVC	BN, BU, BK, WH		X	4,7	9,6	26,0	24
76064	76079	73471	4 x 0,25	PUR	BN, BU, BK, WH		X	4,7	9,6	26,0	24
76065	76080	76094	5 G 0,25	PVC	BN, BU, BK, WH, GN-YE		X	4,8	12,0	30,0	24
76066	76081	76095	5 G 0,25	PVC/PUR	BN, BU, BK, WH, GN-YE		X	4,8	12,0	30,0	24
76071	76086	73472	3 G 0,34	PVC/PUR	BN, BU, GN-YE		X	4,9	9,8	30,0	22
76070	76085	76099	3 x 0,34	PVC	BN, BU, BK		X	4,9	9,8	30,0	22
73485	76087	73368	4 x 0,34	PVC	BN, BU, BK, WH	X		5,2	13,1	43,0	22
73484	76088	72973	4 x 0,34	PVC/PUR	BN, BU, BK, WH		X	5,2	13,1	43,0	22
78240	78241	73728	5 x 0,34	PVC	BN, BU, BK, WH, GY	X		5,9	16,4	54,0	22
76072	76089	73657	5 G 0,34	PVC	BN, BU, BK, WH, GN-YE	X		5,9	16,4	54,0	22
73870	76090	73548	5 G 0,34	PVC/PUR	BN, BU, BK, WH, GN-YE		X	5,9	16,4	54,0	22

Dimensions and specifications may be changed without prior notice.