


# JZ-600 HMH-C flexible control cable, halogen-free, extremely fire resistant, oil resistant<sup>1)</sup>, 0,6/1kV, screened, EMC-preferred type, meter marking

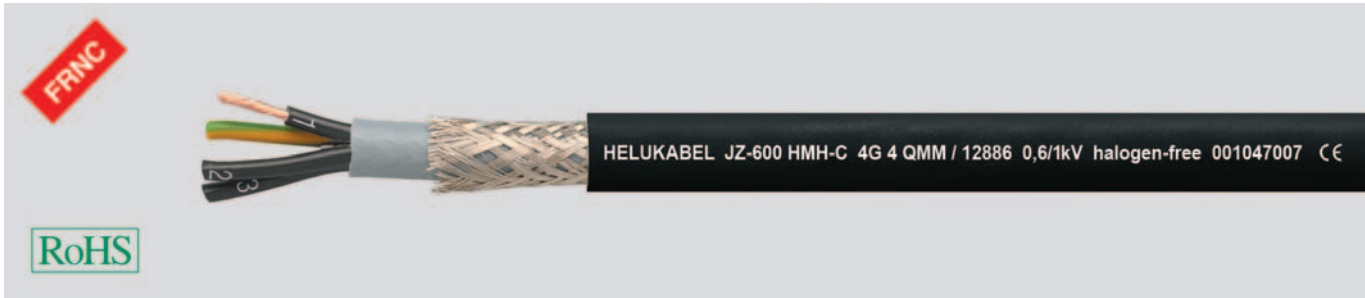

## Technical data

- Halogen-free, flexible control cable, core construction adapted to DIN VDE 0285-525-2-51 / DIN EN 50525-2-51 and DIN VDE 0285-525-3-11 / DIN EN 50525-3-11
- **Temperature range** flexing -15°C to +70°C fixed -40°C to +70°C
- **Nominal voltage**  $U_0/U$  0,6/1 kV
- **Test voltage** 4000 V
- **Coupling resistance** max. 250 Ohm/km
- **Minimum bending radius** flexing 15x cable Ø fixed installation 7,5x cable Ø
- **Radiation resistance** up to  $100 \times 10^6$  cJ/kg (up to 100 Mrad)

## Cable structure

- Bare copper-conductor, to DIN VDE 0295 cl.5, fine-wire, BS 6360 cl.5, IEC 60228 cl.5
- Core insulation of halogen-free polymer compound type T16 to DIN VDE 0207-363-7 / DIN EN 50363-7
- Core identification to DIN VDE 0293 black cores with continuous white numbering
- GN-YE conductor, 3 cores and above in the outer layer
- Cores stranded in layers with optimal lay-length
- Inner sheath
- Tinned copper braided screen, approx. 85% coverage
- Outer sheath of halogen-free polymer compound type, TM7 to DIN VDE 0207-363-8 / DIN EN 50363-8
- Sheath colour black (RAL 9005)
- with meter marking

## Properties

- <sup>1)</sup> For critical applications recommend you request a consultation
  - The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers
- ### Tests
- Flame test acc. to DIN VDE 0482-332-3, BS 4066 part 3, DIN EN 60332-3, IEC 60332-3 (previously DIN VDE 0472 part 804 test method C)
  - Self-extinguishing and flame-resistant acc. to DIN VDE 0482 Part 265-2-1 / EN 50265-2-1 / IEC 60332-1 (equivalent DIN VDE 0472 Part 804 test method B)
  - Corrosiveness of corrosive gases acc. to DIN VDE 0482 part 267, DIN EN 50267-2-2, IEC 607542 (equivalent DIN VDE 0472 part 813)
  - Halogen-free acc. to DIN VDE 0482, Part 267, DIN EN 50267-2-1, IEC 60754-1 (equivalent DIN VDE 0472 part 815)
  - Smoke density acc. to DIN VDE 0482 part 1034-1+2, DIN EN 61034-1+2, IEC 61034-1+2, BS 7622 part 1+2 (previously DIN VDE 0472 part 816)

## Note

- G = with green-yellow conductor
- AWG sizes are approximate equivalent values. The actual cross-section is in mm<sup>2</sup>.
- unscreened analogue type: **JZ-600 HMH**, confer page 91

## Application

Halogen-free, flame retardant cables are used as measuring and control cable in machine tools, conveyor belts, production lines as well as in plant installations, in heating and air-conditioning systems and steel production works. For fixed installation or flexible application, directed without forcing by casual, constantly recurring free movements and without tensile stress, for medium mechanical strain. This cable is suitable for the application in dry, damp and wet environments, outdoors (fixed installation) and for laying on plaster. The dense screening assures interference-free transmission of all signals and impulses.

**EMC** = Electromagnetic compatibility

To optimize the EMC features we recommend a large round contact of the copper braiding on both ends.

CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
12850	3 G 0,5	8,8	45,0	150,0	20
12851	4 G 0,5	9,4	54,0	170,0	20
12852	5 G 0,5	10,2	66,0	199,0	20
12853	7 G 0,5	10,8	79,0	235,0	20
12854	12 G 0,5	14,3	137,0	320,0	20
12855	18 G 0,5	16,4	156,0	428,0	20
12856	25 G 0,5	19,3	250,0	503,0	20
12857	3 G 0,75	9,1	57,0	155,0	19
12858	4 G 0,75	9,9	63,0	190,0	19
12859	5 G 0,75	10,6	76,0	228,0	19
12860	7 G 0,75	11,5	100,0	323,0	19
12861	12 G 0,75	14,9	175,0	410,0	19
12862	18 G 0,75	17,2	240,0	560,0	19
12863	25 G 0,75	20,6	306,0	730,0	19

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
12864	3 G 1	9,8	64,0	163,0	18
12865	4 G 1	10,4	76,0	200,0	18
12866	5 G 1	11,4	89,0	239,0	18
12867	7 G 1	12,3	114,0	289,0	18
12868	12 G 1	15,9	186,0	464,0	18
12869	18 G 1	18,2	284,0	628,0	18
12870	25 G 1	22,0	387,0	855,0	18
12871	3 G 1,5	10,8	82,0	187,0	16
12872	4 G 1,5	11,5	99,0	240,0	16
12873	5 G 1,5	13,0	123,0	289,0	16
12874	7 G 1,5	14,2	148,0	383,0	16
12875	12 G 1,5	18,4	274,0	592,0	16
12876	18 G 1,5	21,3	386,0	806,0	16
12877	25 G 1,5	25,4	531,0	1241,0	16

Continuation ▶

# JZ-600 HMH-C flexible control cable, halogen-free, extremely fire resistant, oil resistant<sup>1)</sup>, 0,6/1kV, screened, EMC-preferred type, meter marking

EAC

A

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
12878	3 G 2,5	12,8	148,0	298,0	14
12879	4 G 2,5	13,8	169,0	345,0	14
12880	5 G 2,5	15,0	220,0	427,0	14
12881	7 G 2,5	16,3	284,0	561,0	14
12882	12 G 2,5	21,6	470,0	857,0	14
12883	18 G 2,5	25,2	572,0	1355,0	14
12884	25 G 2,5	30,0	740,0	1995,0	14
12885	3 G 4	14,6	178,0	391,0	12
12886	4 G 4	15,7	234,0	527,0	12
12887	5 G 4	17,2	284,0	700,0	12
12888	3 G 6	15,9	245,0	629,0	10
12889	4 G 6	17,4	316,0	731,0	10
12890	5 G 6	19,2	442,0	1105,0	10
12891	3 G 10	19,8	367,0	1125,0	8
12892	4 G 10	21,5	549,0	1345,0	8
12893	5 G 10	23,5	604,0	1635,0	8

Part no.	No. cores x cross-sec. mm <sup>2</sup>	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
12894	4 G 16	25,7	807,0	1395,0	6
12895	5 G 16	28,5	940,0	1870,0	6
12896	7 G 16	31,4	1345,0	2720,0	6
12897	3 G 25	28,2	920,0	2465,0	4
12898	4 G 25	31,3	1169,0	2750,0	4
12899	5 G 25	34,5	1420,0	3490,0	4
12900	3 G 35	31,2	1250,0	3230,0	2
12901	4 G 35	34,5	1680,0	4100,0	2
12902	5 G 35	38,0	2020,0	4950,0	2
12903	4 G 50	40,5	2370,0	5780,0	1
12904	4 G 70	46,0	3257,0	7480,0	2/0
12905	4 G 95	51,3	4060,0	10220,0	3/0
12906	4 G 120	56,4	5231,0	13750,0	4/0
12907	4 G 150	64,4	6794,0	15900,0	4/0

Dimensions and specifications may be changed without prior notice. (RA03)



Suitable accessories can be found in Chapter X.

- Cable Gland - HELUTOP® HT-MS-EP4